

VACUUM CLEANERS - WET & DRY - PREMIUM

GP 2/72 W&D GS 2/78 W&D



EXCLUSIVE FEATURES

- AP TUBE
- SANIFILTER
- INNOVATIVE GASKET
- **STRONG HOOKS**
- INDEPENDENT MOTORS
 WITH LIGHT SWITCHES
- SEALANT FLOATER & INTEGRATED ANTIFOAM SYSTEM
- TIPPING TROLLEY
- RELIABLE CONSTRUCTION
 FOR INTENSIVE USE
- DETACHABLE TANK AND
 SOLID CART

MOST FREQUENTLY USE

AGRICULTURE

COSTRUCTION

HARDWARE CUSTOMER

LOGISTIC & TRANSPORT

HEAVY INDUSTRY

AUTOMOTIVE

INNOVATIONS



HIGH SPEED NEW GENERATION MOTORS

SPECS



TIPPING TANK




FLEXIBLE HOSE IS LOCKED SECURELY AND RELIABLY



OPTIONAL FIXED ACCESSORY

TECHNICAL DATA			
		GP 2/72 W&D	GS 2/78 W&D
Code		ASD015240	ASD015513
PERFORMANCE			
Usage		WET&DRY	WET&DRY
Motor		2	2
Power	W	2200 - 2600 max	2200 - 2600 max
Voltage	V	220 - 240	220 - 240
Water lift	mmH ₂ 0	2380	2380
Airflow	m³/h	400	400
Tank Capacity/Material	l	72/plastic	78/steel
Cable length	m	8,5	8,5
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	72	72
Diameter of accessories	mm	38	38
Dimensions (LxWxH)	mm	550x600x1030	550x600x980
Weight	Kg	21,0	22,0

STANDARD EQUIPMENT

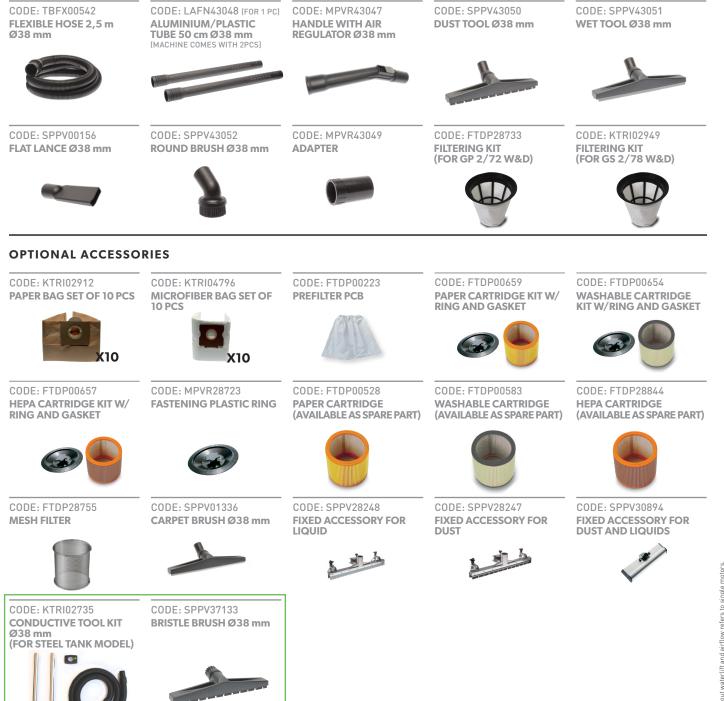

IP Cleaning Srl Viale Treviso 63 - 30026 Summaga di Portogruaro (VE) - Italy Tel. +39 0421 205511 - Fax +39 0421 204227 | info@ipcworldwide.com - www.ipcworldwide.com Information about watertift and airflow refers to single motors. Specifications, descriptions and pictures are supplied as indicative: rights to technical modifications reser

rved without prior